

(19)

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 010 098 B1

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
18.06.2003 Bulletin 2003/25

(21) Application number: 98918292.8

(22) Date of filing: 15.04.1998

(51) Int Cl.7: G06F 17/00

(86) International application number:  
PCT/US98/07660

(87) International publication number:  
WO 98/047080 (22.10.1998 Gazette 1998/42)

(54) NETWORK DELIVERY OF INTERACTIVE ENTERTAINMENT COMPLEMENTING AUDIO  
RECORDING

NETZWERKÜBERMITTLUNG INTERAKTIVER UNTERHALTUNG ZUR ERGÄNZUNG VON  
AUDIO-AUFZEICHNUNGEN

DIFFUSION SUR RESEAU D'ENREGISTREMENTS AUDIO INTERACTIFS COMPLEMENTAIRES  
DE DIVERTISSEMENT

(84) Designated Contracting States:  
DE FR GB IT SE

(30) Priority: 15.04.1997 US 838082

(43) Date of publication of application:  
21.06.2000 Bulletin 2000/25

(60) Divisional application:  
03006164.2

(73) Proprietor: Gracnote, Inc.  
Carmel, Indiana 46032 (US)

(72) Inventors:  
• ROBERTS, Dale, Tyson  
Sausalito, CA 94965 (US)

• GREENBERG, Ann, E.  
San Anselmo, CA 94560 (US)

(74) Representative:  
Skone James, Robert Edmund et al  
GILL JENNINGS & EVERY  
Broadgate House  
7 Eldon Street  
London EC2M 7LH (GB)

(56) References cited:  
EP-A- 0 194 143 WO-A-97/05616

• MASCHA M ET AL: "Interactive education:  
Transitioning CD-ROMs to the Web" COMPUTER  
NETWORKS AND ISDN SYSTEMS, vol. 27, no. 2,  
November 1994, page 267-272 XP004037997

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 1 010 098 B1

## Description

## BACKGROUND

5     1. Field of the Invention

[0001] This invention pertains to the field of computer networking, and more particularly to the use of network protocols to provide services to users that are related to CD ROMs, audio recordings and other distributed media.

10     2. Related Art

[0002] Over the past few years, on-line services have experienced explosive growth and have become a major new form of entertainment. Alongside this new entertainment, more traditional forms such as musical recordings have continued to be consumed on a massive scale.

15     [0003] The traditional experience of the musical recording is listening by a small group of persons gathered together in a room. The music fills the room acoustically, but there is little associated visual content, and there is only a limited interaction with the recording, consisting essentially of deciding which tracks to play and performing simple transformations on the recorded sound, such as setting the volume or applying an audio equalizer. This traditional experience dates back to the early age of 78 r.p.m. musical recordings almost a century ago.

20     [0004] The traditional production of a musical recording complements the traditional experience of the recording. The recording is produced in a number of recording sessions, subject to careful mixing and editing, and then released to the public. At that point, the recording is in a fixed form, nowadays, an audio CD, whose purpose is to record as faithfully as possible the final sonic experience designed by its authors, the musicians, producer, and recording engineers.

25     [0005] Music videos have supplemented the traditional experience of musical recordings by allowing the association of visual content with tracks of such a recording. In practice, however, music videos have been broadcast, with all the problems of lack of user control which that implies, and they have not contributed to interactivity or participation by the consumer.

30     [0006] In EP-A-194143 (Sony) there is disclosed a videotex system developed by Sony in which a database center can control a video disc or CD player among other devices.

[0007] On-line services offer opportunities for enriching the experience associated with prerecorded material. The present invention is addressed to computer programs, systems, and protocols which can fulfill this promise.

[0008] In accordance with a first aspect of the present invention, a method of synchronizing content from a first a CD with complementary content from a remote device delivered over a network, is characterized by:

35             playing a first CD on a local electronic device to manifest first CD content;  
              transferring complementary content and synchronization information from a remote device to said local device over a network; and  
              controlling said local electronic device to display said complementary content in synchronization with manifestation  
40             of said first CD content based on said synchronization information and CD status information read from said first CD.

[0009] In accordance with a second aspect of the present invention, a device for synchronizing content from a first CD with complementary content from a remote device delivered over a network, comprises a local electronic device having a video display;

45             a CD player connected to or integral with said local electronic device; and  
              a communication unit to transfer complementary content and synchronization information from a remote device to said local device over a network,

              said local electronic device synchronizing manifestation of said complementary content in synchronization with content on said first CD by using said synchronization information and CD status information from said CD.

50     [0010] This invention enables the provision of computer programs, systems, and protocols which allow producers to deliver entertainment complementary to distributed media recordings by means of on-line services such as the Internet, and allow such complementary entertainment to be meaningfully interactive for the consumer, such that the consumer can also be a creator of the experience.

[0011] The invention also provides implementations designed to attain integration with existing environments and programs, particularly on the Internet, while retaining the flexibility to adapt to the continuing evolution of stands for  
55     on-line services.

[0012] In a first aspect of the present invention provides a means for producers and sellers of distributed media such as CDs to maintain and strengthen their connection to their customers. Record companies download and periodically

update a central library of complementary content for CD's the company has in the market. The software of the present invention operate as a plug-in to a users web browser and directs a user with a record company's CD to a particular section of the central library appropriate for the user's CD.

[0013] In another aspect of the present invention, called "CD Watcher" data representative of the users listening habits relative to a record company's CD is transferred to the record company when complementary content is delivered to the user over a network connection.

[0014] Alternatively, record companies contributing and maintaining the central library have access to the listening habits of all users who have accessed the central library for complementary content.

[0015] In another aspect of the invention, software is provided which permits a computer program running on a remote host to control a distributed media player such as a compact disk (CD) player, DVD player, or the like on a user's computer. (For convenience, we use the term "CD" to refer to all distributed media and the term "CD player" to refer also to all distributed media players such as DVD players and similar devices.) The software is designed to permit the remote host both to initiate actions on the CD player and to become aware of actions which the user has initiated by other control means, such as the buttons on the CD player's front panel or a different CD player control program.

This aspect of the invention is a building-block for the provision of complementary entertainment for CD content when those recordings are fixed in the prevailing contemporary form, the CD.

[0016] In another aspect of the invention, visual content, including interactive content, may be delivered over an on-line service in such a way that it is synchronized to the delivery of content from a musical recording. Such visual content may, for example, be synchronized to the playing of an audio CD or other distributed media in the user's computer. The visual content is thematically linked to the musical recording, for example in the manner of a music video.

[0017] In a further aspect of the invention, a method is provided for determining or assigning a substantially unique identifier to CD or other distributed media content consisting of a number of tracks. A unique identifier is a useful complement to the delivery of supplementary content in conjunction with the playing of a CD or other distributed media in that it allows the software which delivers the supplementary content to be sure that the CD is in fact the correct CD to which the supplementary content corresponds. If the supplementary content is designed, for example, to accompany the Rosary Sonatas of Heinrich Ignaz Franz Biber, it would presumably not function well if the CD or other distributed media in the user's player were the soundtrack for the film Mary Poppins. The unique identifier also allows a CD or other distributed media to be used as a key to access a premium Web area. Furthermore, the unique identifier can allow the user to be directed to an area of the Web corresponding to the CD or other distributed media which is in the user's machine.

[0018] In a still further aspect of the invention, the immensely popular on-line service generally referred to as a "chat room" may be enhanced by means of a link to a CD recording which all persons in the room are playing. A remote host may control distributed media players in multiple remote locations. The chat room experience as it exists today in on-line services has a disembodied quality by comparison with traditional face-to-face social encounters in which there are identifiable surroundings. The only common experience to the chat users today are the words of the chat as they fly by on a computer screen, and perhaps the user icons ("avatars") or other visual content occupying a small space on the screen. The use of a musical recording in conjunction with a chat room opens up the possibility of restoring to the experience a degree of the shared ambience of traditional social encounters. Furthermore, shared content such as a musical recording offers a focal point that allows chat-seekers to group together by means of shared interests in a particular type of recording.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0019]

Fig. 1 is a network diagram of a first embodiment of the present invention.

Fig. 2 is a flow diagram of the embodiment shown in Fig. 1.

Fig. 3 is a block diagram of the environment in which the present invention operates.

Fig. 4 is a block diagram of complementary content according to an aspect of the present invention.

Fig. 5 is a flowchart of the synchronization code of the invention.

Fig. 6 is a flowchart of the sequence of operations for connecting the present invention to a chat room.

## DESCRIPTION OF PREFERRED EMBODIMENTS

[0020] Referring to Fig.'s 1 and 2, an embodiment of the present invention dynamically connects a user playing a CD with a remote host for data exchange. At block 11, the user links to a remote host and requests a download of client 26. To receive the download the user must provide some basic information, name, e-mail, chat name, etc. The registration information is exchanged for client 26 at block 11A. At block 10A user computer 10 is running computer program 12 such as a browser with client 26. At block 30A insertion of CD 30 into player 32 triggers action by client 26. Client 26 takes control of player 32 and scans CD 30. CD 31 may include time code 31A and other encoded data 31B. Client 26 uses the results of the CD scan to calculate a substantially unique CD ID 31, block 34. Some CD's may contain an ID text file or IRC code, there is no universal standard, thus an ID calculation technique may yield a useful ID with any CD. This technique may create a pattern match 31F by sampling a subset of the content of CD 30 and using the sample to create a substantially unique pattern match 31F of CD 30. While client 26 is calculating CD ID 31, at block 36 use demographic data 62 is also collected and temporarily stored by client 26.

[0021] Use demographic data 62 includes but is not limited to CD use profiles including most used tracks, total time of use, most used CDs, average length of time computer 10 is running, software loaded, most used software, software running concurrently with client and the like.

[0022] Calculation of a CD ID 31 stimulates client 26 to direct computer program 12 to check a local cache for CD ID 31. If CD ID 31 is not present in the local cache client 26 links to look-up server 40 at block 38. If computer program 12 is not already running, client 26 may launch it. Once the link to look-up server 40 is established, client 26 sends CD ID 31 to look-up server 40. Look-up server 40 compares CD ID 31 against table 42. Table 42 is a look-up table linking CD ID's with some associated content and with particular addresses having complementary content. Other information such as timing and control data, electronic coupons, advertisements and bonus content such as video with timing and control data may also be contained in table 42. At block 44, look-up server 40 sends information such as address 46 to the user in response to receipt of CD ID 31. The information sent to the user may or may not be based on the user demographic data and use demographic data 62 sent to look-up server 40. At block 48 client 26 establishes a link to address 46. Address 46 may be a premium or subscription site such as site 51A in which case CD ID 31 may operate as a password.

[0023] In one aspect of the present invention, content suppliers 51-56 such as record companies 1-6 respectively, maintain a central library 50 on the web. Content suppliers may also include advertisers, CD retailers, and other content rights holders. Central library 50 may be on a single server such as look-up server 40 or it may be distributed. Central library 50 contains the complementary content sites such as site 51A linked by the addresses in table 42 such as address 46. Each content supplier 51-56 may change the content of their site and add new links to additional sites as new CD's are released. As new sites are added, new CD ID's and linked addresses are added to table 42.

[0024] At block 49A, server 58 hosting site 51A transfers complementary content 60 to the user's computer 10. Once the user is linked to site 51A, client 26 sends stored use demographic data 62 and CD status data 64 to look-up server 40 and or server 58. At block 66 client 26 continues to update and transfer use demographic data 62 and CD status data 64 to look-up server 40 and or server 58 as long as client 26 is running. Closed loop update 70 permits a content supplier, such as content suppliers 51-56, a real-time or near real-time look at which CDs are in use and relative frequency of use of CD elements and related information. Closed loop update 70 also provides control of distributed media playing on a users computer 10. A removal or change of CD at block 68 would return the client to block 30A.

[0025] In another embodiment, this invention operates on the World Wide Web. The HTTP protocol on the web is run atop a general connection-oriented protocol, which today is generally TCP/IP, described in Douglas E. Comer, *Internetworking with TCP/IP* (3d ed. 1995). However, the invention described here is not limited to HTTP running over any particular kind of network software or hardware. The principles of the invention apply to other protocols for access to remote information that may come to compete with or supplant HTTP.

[0026] Referring now to Fig. 3, a user sits at his or her computer 10 and runs a computer program 12 such as a browser or other client software. The browser sends out HTTP requests 14 to other computers, referred to as servers such as server 16. In requests, particular items of data, referred to as resources, which are available on servers, are referred to by means of uniform resource locators (URL's), character strings in a particular format defined in Berners-Lee et al., *supra*. A URL includes both an identification of the server and an identification of a particular item of data within the server. Reacting to the requests, the servers return responses 18 to the user's browser, and the browser acts upon those responses, generally by displaying some sort of content to the user.

[0027] The content portion of the responses can be a "Web page," expressed in the hypertext markup language (HTML) such as pages 20 and 22. That language allows one to express content consisting of text interspersed with bitmap-format images and links (also known as anchors and hyperlinks). The links are further URL's to which the browser may, at the user's prompting, send further requests.

[0028] The responses can also include more complex commands to be interpreted by the browser, e.g., commands which result in an animation as discussed below for Fig. 4. HTML itself does not define complex commands, but rather

they are considered to belong to separately-defined scripting languages, of which two currently common ones are JavaScript and VBScript.

[0029] In addition to extending the function of the browser by means of code written in a scripting language, it is also possible to extend the function of a browser with compiled code. Such compiled code is referred to as a "plug-in." The precise protocol for writing a plug-in is dependent on the particular browser. Plug-ins for the Microsoft browser are referred to by the name of ActiveX controls.

[0030] Plug-ins may be very complex. A plug-in which may advantageously be used in connection with the invention is Shockwave from Macromedia. It permits animations which are part of a server response to be downloaded and played to the user. Shockwave defines its own scripting language called Lingo. Lingo scripts are contained within the downloadable animations which the Shockwave plug-in can play. The general format of a Shockwave animation is a timeline consisting of a series of frames, together with a number of visual objects which appear, perform motions, and disappear at particular frames within the timeline. To achieve more complex effects within a Shockwave animation, Lingo scripts may be invoked in addition to predefined visual objects.

[0031] A currently preferred embodiment of the present invention employs a plug-in, referred to as the command plug-in 24, which provides to a scripting language the ability to command and monitor in a detailed fashion the playing of a CD recording. The command plug-in should provide and monitor, at a minimum, the following basic functions:

- (1) Start and stop play.
- (2) Get current track and position within the track.
- (3) Seek to a track and a position within the track.
- (4) Get and set volume.
- (5) Get information regarding the CD (e.g., the number of tracks, their lengths, the pauses between tracks).
- (6) Get information regarding the capabilities of the CD drive.

[0032] Other functions may be provided and monitored, limited only by what the underlying operating system services are able to accommodate. The monitored functions are included in use demographic data 62 which is transferred to server 40 and/or servers such as server 58.

[0033] The command plug-in may be written in a conventional programming language such as C++. The plug-in must conform to the existing standards for plug-ins, such as those required of Microsoft ActiveX objects. In order to obtain the information and carry out the functions which the command plug-in makes available to the scripting language, the command plug-in relies on functions which provide control and information regarding the playing musical recording. These functions will depend on the precise source of the recording. If, as in one embodiment of the present invention, the recording being played is an audio CD in the computer CD player, and if the browser is running under Microsoft Windows 3.1 or Windows 95 or Windows CE, these functions would be the MCI functions, which form a part of the Win32 application programming interface. These functions are documented, for example, in Microsoft Win32 Programmer's Reference. Different functions may be provided by streaming audio receivers, as for example receivers which capture audio which is coming into the user's computer over a network connection in a suitable audio encoding format such as MPEG.

[0034] An important point to note about the implementation of the command plug-in is that the operations which it carries out, as for example "seeks", may take times on the order of a second. It is undesirable for command-plug-in 24 to retain control of computer 10 during that interval, so it is important that command plug-in 24 relinquish control of computer 10 to the browser whenever a lengthy operation is undertaken, and report on the results of the operation via the asynchronous event handling capability used in the common scripting languages.

[0035] Given the above summary of the functions which the command plug-in provides, a general knowledge of how to write plug-ins (e.g., of how to write ActiveX objects), and a knowledge of the relevant application programming interface for controlling the play of the CD (e.g., MCI in Win32), a person skilled in the art could readily and without undue experimentation develop an actual working command plug-in. For this reason, further details of how the command plug-in is implemented are not provided here.

[0036] The existence of a command plug-in providing the functions listed above to a scripting language is a foundation on which entertainment complementary to the content of a CD may be constructed. In particular, it is possible to devise, building on this foundation, a method for synchronizing the display of complementary content by means of the scripting language with the events which are occurring on the CD.

[0037] Referring now to Fig's 4 and 5, synchronization of the complementary content to the CD proceeds as follows. For example, complementary content 60 may be provided by means of animation such as Shockwave animation, including frames  $F_1$ - $F_n$  and script 72. Complementary content 60 is downloaded from server 58 and displayed for the user by means of a Shockwave plug-in. This downloading may take place before the animation is displayed, or alternatively it may take place as the animation is being displayed, provided the user's connection to the network is fast enough to support download at an appropriate speed. The downloading is a function provided by the Shockwave plug-

in itself.

[0038] As the Shockwave animation is played, script 72 such as a Lingo script executes each time a frame  $F_n$  finishes displaying. The Lingo script contains a description of the relationship which should exist between frames of the animation and segments of the CD content, identified by track number and by time. The Lingo script determines, by means of the command plug-in described above, at which track and time the play of the CD is. It then refers to the description in order to determine which frames of the animation correspond to that portion of the CD. If the current frame is not one of those frames, the Lingo script resets the time line of the animation so that the animation will begin to play at the frame which corresponds to the current position of the CD. This permits the visual content to catch up if it ever lags the CD, for example because downloading from the network has fallen behind, because the user's computer lacks the cycles to play the animation at full speed, or because the user has fast-forwarded the CD.

[0039] Referring now to Fig 4, the synchronization algorithm may control individual frames or groups of contiguous frames. complementary content 60 includes frames  $F_1$ - $F_n$  and script 72. At block 200, a correspondence is established between each frame  $E_n$  or group of frames and a particular segment of CD 30. At the end of each frame  $F_n$  of the animation block 205, the position of CD 30 is determined, block 210. A test is done at block 215 to determine whether the position of CD 30 is within the segment of the recording that corresponds to the group of frames to which the next sequential frame belongs. If the position of CD 30 is within that segment, the playback of the animation proceeds with the next frame, block 230. If the position of CD 30 is not within that segment, then at blocks 220 and 225 the playback of the animation is advanced to the frame corresponding to where the CD is.

[0040] A further aspect of the present invention is a touring mode. With client 26 in touring mode, a remote device such as server 58 may control one or more user devices through delivery of complementary content 60 interspersed with player 26 control data to provide the one or more users with a guided tour of a particular distributed media such as CD 30.

[0041] A further aspect of the invention is the ability, by making use of command plug-in 24, to provide a technique for establishing a unique identifier for a CD, CD ID 31, which is located in the user's CD player 32. The unique identifier may be based on the number and lengths of the tracks (measured in blocks, i.e., 1/75ths of a second), so that the identifier would be a concatenation of these lengths. In practice, however, it is desirable to have a somewhat shorter identifier, so the unique identifier is preferably the concatenation of the track lengths expressed in a fairly coarse unit, such as 1/4th of a second.

[0042] Appendix A contains source code, written in C, for a fuzzy comparison algorithm suitable for determining whether two audio CDs are exactly or approximately the same. The fuzzy comparison algorithm proceeds as follows. For each of the two audio CDs to be compared, one determines the lengths of all the tracks in the recordings in milliseconds. One then shifts all track lengths to the right by eight bits, in effect performing a truncating division by  $28 = 256$ . One then goes through both of the recordings track by track, accumulating as one proceeds two numbers, the match total and the match error. These numbers are both initialized to zero at the start of the comparison. For each of the tracks, one increments the match total by the shifted length of that track in the first CD to be compared, and one increments the match error by the absolute value of the difference between the shifted lengths of the track in the two CDs. When one gets to the last track in the CD with the fewer number of tracks, one continues with the tracks in the other CD, incrementing both the match total and the match error by the shifted lengths of those tracks. Following these steps of going through the tracks, the algorithm then divides the match error by the match number, subtracts the resulting quotient from 1, and converts the difference to a percentage which is indicative of how well the two CDs match.

[0043] Appendix B contains source code, written in C, for a comparison algorithm suitable for determining whether two audio CDs are exactly the same. The algorithm generates from the number of tracks, the track lengths, and the start and end times of the tracks an 8-byte value. The high order 4 bytes are obtained by summing the start and end times of all tracks, expressed in milliseconds. The low order 4 bytes are obtained by summing the lengths of all tracks expressed in milliseconds, shifting the sum left ten bits, and adding the number of tracks.

[0044] CD ID 31 may be employed as a database key. A site such as site 52A may maintain a database of information about CDs, for example information about all CDs issued by record company 2 can be maintained on that record company's site. There are various alternative ways for users to navigate this information. For example, they could use a Web page containing many hyperlinks as a table of contents, or they could use a conventional search engine. A third way of searching, which is enabled by CD ID 31 of the invention, is for there to be a Web page which invites the user to place in player 32 the CD about which he or she is seeking information, for example CD 30. Upon detection of the presence of CD 30 in the drive, a script in the Web page computes CD ID 31 corresponding to CD 30 and sends it to server 58. Server 58 then displays information about the CD retrieved from a database on the basis of CD ID 31. This information may include a Web address (URL) that is related to the CD (e.g., that of the artists' home page), simple data such as the names of songs on the CD, and also complementary entertainment, including potentially photographs (e.g., of the band), artwork, animations, and video clips. It is also possible to arrange things so that, when the user inserts a CD into the computer, (i) the Web browser is launched if not already running, (ii) the browser computes the CD's unique identifier and from that unique identifier derives a URL, and (iii) the browser does an HTTP get transaction

on that URL.

[0045] An alternative application of unique identifiers for musical recordings is to employ a CD as a key for entering into a premium area of the Web. There are presently premium areas of the Web to which people are admitted by subscription. A simple form of admission based on the unique identifier is to require, before accessing a particular area of the Web, that the user place in his or her CD drive a particular CD, or a CD published by a particular company or containing the music of a particular band or artist. This is readily accomplished by means of a script which invokes the functions provided by the command plug-in and computes a unique identifier.

[0046] Another aspect of the invention is the connection of chat rooms with musical recordings. The goal is to provide all participants in a chat room with the same music at approximately the same time.

[0047] One conventional network protocol for chat services is Internet Relay Chat (IRC), described J. Oikarinen & D. Reed, Internet Relay Chat Protocol (Internet Request for Comments No. 1459, 1993). In this protocol, when one becomes a client of a chat server, one sends the name of a chat room. The chat server receives messages from all of its clients and-relays the messages sent in by one client to all the other clients connected in the same room as that client. The messages which a client sends are typically typed in by the user who is running the client, and the messages which a client receives are typically displayed for the user who is running the client to read.

[0048] In a preferred embodiment of the invention, a chat client is customized by means of a plug-in, which we will call the chat plug-in. The chat client is started up by a browser as follows (see Fig. 5). The user connects by means of the browser to a central Web page (box 300) which, upon being downloaded, asks that the user insert a CD into his or her player (box 305). A unique identifier of the CD is computed and communicated back to the server by using the control plug-in described above under the command of a script in the central Web page (box 310). The server then employs the unique identifier to determine whether it has a chat room focused on the CD (box 315). This step may be carried out by looking the unique identifier up in a database using techniques well known in the art. There exists a vast literature on connecting Web pages to databases, e.g., Decker & Ginsburg, supra, chapter 21. If a chat room focused on the CD exists or can be created, the server responds with the name of that chat room, and the browser starts up a chat client on the user's computer as a client of that chat room (box 320).

[0049] The chat room's name is set by the server to contain information about the track which the CD is playing in the other chat room clients' machines and the time at which the track started to play, as well as about the volume at which the CD is playing. The chat client plug-in employs that information to direct the control plug-in to set the CD in the user's computer to play in such a manner that it is approximately synchronized to the CD which is playing in the other chat room clients' machines (box 320).

[0050] Each user in the chat room is able to control the CD which is playing in his or her machine. Control actions result in the chat plug-in sending messages to the chat server which describe the control action being taken (box 325). For example, such messages may indicate a change in the position of the CD, a change in the volume, or the ejection of the CD to replace it with another. The chat plug-ins running on the other users' machines, upon seeing a message of this kind, replicate the action (as far as possible) on the other users' machines by using the control plug-in described above (box 330).

[0051] In a further aspect of the invention, a chat room focused on a particular musical recording might allow for a voting procedure to select particular tracks. A simple voting procedure would be for each chat plug-in to act upon a change message of the kind described in the preceding paragraph only when it sees two identical consecutive change messages. This would mean that in order to change the track which is being played, it would be necessary for two users to change to that track. The number two may be replaced by a higher number.

[0052] In a further aspect of the invention the messages delivered to the users of a chat can be driven from a text file rather than manual typing. This would allow a pre-recorded experience to be played back for a group of chat users. Such a technique may be used to create a pre-recorded, narrated tour of an audio CD.

[0053] An important advantage of the embodiment described above is that it may be used with any chat server software which supports the minimal functionality required by Internet Relay Chat or by a protocol providing similar minimum chat service. The additional software required is located in the chat client plug-in and in the central Web page, with its connection to a database of CD information.

## APPENDIX A

```

/*
 * FUZZY CD ID
5  * (c) 1996-1998 ION Inc.
 *
 *
 * by Ty Roberts
10 */

#include <stdio.h>
#include <stdlib.h>
#include <time.h>
15

struct fuzzyCDid {
    short          numberTracks; // start time in
    milliseconds
20    unsigned short    fuzzlength[100];
};

typedef struct fuzzyCDid fuzzyCDid, *fuzzyCDidPtr;

25 // structure of a cd track with all times stored in milliseconds

struct cdtrack {
    long beginMs; // start time in milliseconds
    long endMs;   // end time in milliseconds
30    long lengthMs; // length in milliseconds
};

typedef struct cdtrack cdtrack, *cdTrackPtr;

35 struct cd {
    short    numberTracks;
    cdtrack  track[100];
};

40 typedef struct cd cd, *cdPtr;

void CreateFuzzyId( fuzzyCDidPtr fid, cdPtr cd );

45 float    FuzzyMatch( fuzzyCDidPtr fid1, fuzzyCDidPtr fid2 );

// SUBROUTINES

50 void CreateFuzzyId( fuzzyCDidPtr fid, cdPtr cd )
{

```

55



```

long    i;

// first copy in the number of tracks
5   fid->numberTracks = cd->numberTracks;

    for(i=0;i<fid->numberTracks;i++) {
        // shift left and create a MSB length thats not exact
10   fid->fuzzlength[i] = (short)(cd-
>track[i].lengthMs>>8);
    }

15 float    FuzzyMatch( fuzzyCDidPtr fid1, fuzzyCDidPtr fid2 )
{
    long    fidmatcherr = 0, fidmatchtotal = 0;
    short    i, trackcnt;
20   float    matchpercent;

    // find the larger number of tracks
    trackcnt = fid1->numberTracks<fid2->numberTracks ? fid2-
>numberTracks : fid1->numberTracks;

25   // cycle thru the tracks accumulating error and total
    comparedtimes
    for(i=0;i<trackcnt;i++) {
        if ((i < fid1->numberTracks) && (i < fid2-
30   >numberTracks)) {
            fidmatcherr += abs(fid1->fuzzlength[i] - fid2-
>fuzzlength[i]);
            fidmatchtotal += fid1->fuzzlength[i];
35   } else if (i >= fid2->numberTracks) {
            fidmatcherr += fid1->fuzzlength[i];
            fidmatchtotal += fid1->fuzzlength[i];
        } else if (i >= fid1->numberTracks) {
            fidmatcherr += fid2->fuzzlength[i];
40   fidmatchtotal += fid2->fuzzlength[i];
        }
    }

    if (fidmatcherr > 0) {
45   matchpercent = 100 -
        (((float)fidmatcherr/(float)fidmatchtotal) *100);
    } else {
        matchpercent = 100;
50   }
    return matchpercent;
}

```

55

```

void main(void)
{
5     short i;
      float    matchpercent;

      // create global structures for two complete cds with up to
100 tracks
10     cd    cd2id;
      fuzzyCDid fidcd2id;
      cd    cdFromDB;

15     fuzzyCDid fidcdFromDB;

      printf ("Test #1 will compare two CDs that are exactly the
same\n\n");

20     // put in some test values for the cd track lengths
      // since these are in ms, its basically 60000 = 1 minute

      cd2id.track[0].lengthMs = 121323;
      cd2id.track[1].lengthMs = 234565;
25     cd2id.track[2].lengthMs = 566437;
      cd2id.track[3].lengthMs = 245120;
      cd2id.track[4].lengthMs = 20000;
      cd2id.track[5].lengthMs = 120386;
30     cd2id.track[6].lengthMs = 323453;
      cd2id.numberTracks = 7;

      for(i=1;i<cd2id.numberTracks;i++) {
          printf ("CD #1: Track = %d length in minutes = %f\n",
35             i, (float)cd2id.track[i].lengthMs/60000.0);
      }
      printf("\n");

40     cdFromDB.track[0].lengthMs = 121323;
      cdFromDB.track[1].lengthMs = 234565;
      cdFromDB.track[2].lengthMs = 566437;
      cdFromDB.track[3].lengthMs = 245120;
      cdFromDB.track[4].lengthMs = 20000;
45     cdFromDB.track[5].lengthMs = 120386;
      cdFromDB.track[6].lengthMs = 323453;
      cdFromDB.numberTracks = 7;

      for(i=1;i<cdFromDB.numberTracks;i++) {
50         printf ("CD #2: Track = %d length in minutes = %f\n",

```

55

```

        i, (float)cdFromDB.track[i].lengthMs/60000.0 );
    }

5      CreateFuzzyId( &fidcd2id, &cd2id );
      CreateFuzzyId( &fidcdFromDB, &cdFromDB );

      matchpercent = FuzzyMatch( &fidcd2id, &fidcdFromDB );
10     printf ("The cd's matchpercent was computed as=%f",
matchpercent);
      printf ("\n");
      printf ("\n");

15     printf ("Test #2 will compare two cd that are nearly the
same\nexcept they have diffent # of tracks \n");

      // put in some test values for the cd track lengths
      // since these are in ms, its basically 60000 = 1 minute
20     cd2id.track[0].lengthMs = 121323;
      cd2id.track[1].lengthMs = 234565;
      cd2id.track[2].lengthMs = 566437;
      cd2id.track[3].lengthMs = 245120;
25     cd2id.track[4].lengthMs = 20000;
      cd2id.track[5].lengthMs = 120386;

      cd2id.track[6].lengthMs = 323453;
      cd2id.numberTracks = 7;

30     for(i=1;i<cd2id.numberTracks;i++) {
        printf ("CD #1: Track = %d length in minutes = %f\n",
            i, (float)cd2id.track[i].lengthMs/60000.0 );
    }
35     printf ("\n");
      cdFromDB.track[0].lengthMs = 121323;
      cdFromDB.track[1].lengthMs = 234565;
      cdFromDB.track[2].lengthMs = 566437;
40     cdFromDB.track[3].lengthMs = 245120;
      cdFromDB.track[4].lengthMs = 20000;
      cdFromDB.track[5].lengthMs = 120386;
      cdFromDB.numberTracks = 6;

45     for(i=1;i<cdFromDB.numberTracks;i++) {
        printf ("CD #2: Track = %d length in minutes = %f\n",
            i, (float)cdFromDB.track[i].lengthMs/60000.0 );
    }

50     CreateFuzzyId( &fidcd2id, &cd2id );

55

```

```

CreateFuzzyId( &fidcdFromDB, &cdFromDB );
matchpercent = FuzzyMatch( &fidcd2id, &fidcdFromDB );

5   printf ("The cd's matchpercent was computed
as=%f",matchpercent);
    printf ("\n");
    printf ("\n");
10  printf ("Test #3 will compare two cd that are not the
same\n\n");

    // put in some test values for the cd track lengths
    // since these are in ms, its basically 60000 = 1 minute
15  cd2id.track[0].lengthMs = 34213;
    cd2id.track[1].lengthMs = 334565;
    cd2id.track[2].lengthMs = 231423;
    cd2id.track[3].lengthMs = 134122;
    cd2id.track[4].lengthMs = 2342;
20  cd2id.track[5].lengthMs = 3487;
    cd2id.track[6].lengthMs = 9976;
    cd2id.numberTracks = 7;

25  for(i=1;i<cd2id.numberTracks;i++) {
        printf ("CD #1: Track = %d length in minutes = %f\n",
            i, (float)cd2id.track[i].lengthMs/60000.0 );
    }
    printf ("\n");
30  cdFromDB.track[0].lengthMs = 121323;
    cdFromDB.track[1].lengthMs = 234565;
    cdFromDB.track[2].lengthMs = 566437;
    cdFromDB.track[3].lengthMs = 245120;
    cdFromDB.track[4].lengthMs = 20000;
35  cdFromDB.track[5].lengthMs = 120386;
    cdFromDB.track[6].lengthMs = 323453;
    cdFromDB.numberTracks = 6;

40  for(i=1;i<cdFromDB.numberTracks;i++) {
        printf ("CD #2: Track = %d length in minutes = %f\n",
            i, (float)cdFromDB.track[i].lengthMs/60000.0 );
    }

45  CreateFuzzyId( &fidcd2id, &cd2id);
    CreateFuzzyId( &fidcdFromDB, &cdFromDB);

    matchpercent = FuzzyMatch( &fidcd2id, &fidcdFromDB );

50

55  printf ("The cd's matchpercent was computed
as=%f",matchpercent);
    }

```

## APPENDIX B

```

5      /*
      *   EXACT MATCH CD ID
      *   © 1996-1998 ION Inc.
      *
10     *   by Ty Roberts
      */

#include <stdio.h>
#include <stdlib.h>
15  #include <time.h>

struct cdid{
    long id[2];
20 };

typedef struct cdid cdid, *cdidPtr;

25 // structure of a cd track with all times stored in milliseconds

struct cdtrack{
    long beginMs; // start time in milliseconds
    long endMs;   // end time in milliseconds
30    long lengthMs; //length in Miliseconds
};

typedef struct cdtrack cdtrack, *cdTrackPtr;

35 struct cd {
    short    numberTracks;
    cdtrack  track[100];
};

40 typedef struct cd cd, *cdPtr;

void CreateUniqueId( cdidPtr cid, cdPtr cd );

45 // SUBROUTINES
void CreateUniqueId( cdidPtr cid, cdPtr cd )
{
    long      i, t, n;

50    t = 0;
    n = 0;

55

```

```

    for(i=0;i<cd->numberTracks;i++) {
5         // shift left and create a MSB length thats not exact
          t += cd->track[i].lengthMs;
          n += cd->track[i].beginMs + cd->track[i].endMs;
    }
10    cid->id[0] = t<<10+cd->numberTracks;
    cid->id[1] = n;

    )

15    void main(void)
    {
        short i;
        short    matchtest;

20        // create global structures for two complete cds with up to
        100 tracks
        cd    cd2id;
        cdid cd2UID;

25        cd    cdFromDB;
        cdid cdFromDBUID;

        printf ("Test #1 will compare two cd that are exactly the
30        same\n\n");

        // put in some test values for the cd track lengths
        // since thes are in ms, its basically 60000 = 1 minute
35        cd2id.track[0].beginMs = 0;
        cd2id.track[1].beginMs = 100001;
        cd2id.track[2].beginMs = 231001;
        cd2id.track[3].beginMs = 345001;
        cd2id.track[4].beginMs = 435001;
40        cd2id.track[5].beginMs = 460001;
        cd2id.track[6].beginMs = 590001;

        cd2id.track[0].endMs = 100000;
        cd2id.track[1].endMs = 231000;
45        cd2id.track[2].endMs = 345000;
        cd2id.track[3].endMs = 435000;
        cd2id.track[4].endMs = 460000;
        cd2id.track[5].endMs = 590000;
50        cd2id.track[6].endMs = 690000;
        cd2id.track[0].lengthMs = cd2id.track[0].endMs -
        cd2id.track[0].beginMs;

55

```

```

    cd2id.track[1].lengthMs = cd2id.track[1].endMs -
cd2id.track[1].beginMs;
5    cd2id.track[2].lengthMs = cd2id.track[2].endMs -
cd2id.track[2].beginMs;
    cd2id.track[3].lengthMs = cd2id.track[3].endMs -
cd2id.track[3].beginMs;
10    cd2id.track[4].lengthMs = cd2id.track[4].endMs -
cd2id.track[4].beginMs;
    cd2id.track[5].lengthMs = cd2id.track[5].endMs -
cd2id.track[5].beginMs;
    cd2id.track[6].lengthMs = cd2id.track[6].endMs -
15    cd2id.track[6].beginMs;
    cd2id.numberTracks = 7;

    for(i=1;i<cd2id.numberTracks;i++) {
20        printf ("CD #1: Track = %d    length inminutes = %f\n",
i, (float)cd2id.track[i].lengthMs/60000.0 );
    }
    printf ("\n");
    cdFromDB.track[0].beginMs = 0;
25    cdFromDB.track[1].beginMs = 100001;
    cdFromDB.track[2].beginMs = 231001;
    cdFromDB.track[3].beginMs = 345001;
    cdFromDB.track[4].beginMs = 435001;
30    cdFromDB.track[5].beginMs = 460001;
    cdFromDB.track[6].beginMs = 590001;
    cdFromDB.track[0].endMs = 100000;
    cdFromDB.track[1].endMs = 231000;
    cdFromDB.track[2].endMs = 345000;
35    cdFromDB.track[3].endMs = 435000;
    cdFromDB.track[4].endMs = 460000;
    cdFromDB.track[5].endMs = 590000;
    cdFromDB.track[6].endMs = 690000;
    cdFromDB.track[0].lengthMs = cd2id.track[0].endMs -
40    cd2id.track[0].beginMs;
    cdFromDB.track[1].lengthMs = cd2id.track[1].endMs -
cd2id.track[1].beginMs;
    cdFromDB.track[2].lengthMs = cd2id.track[2].endMs -
cd2id.track[2].beginMs;
45    cdFromDB.track[3].lengthMs = cd2id.track[3].endMs -
cd2id.track[3].beginMs;
    cdFromDB.track[4].lengthMs = cd2id.track[4].endMs -
cd2id.track[4].beginMs;
50    cdFromDB.track[5].lengthMs = cd2id.track[5].endMs -
cd2id.track[5].beginMs;

```

55

```

    cdFromDB.track[6].lengthMs = cd2id.track[6].endMs -
5    cd2id.track[6].beginMs;
    cdFromDB.numberTracks = 7;

    for(i=1;i<cdFromDB.numberTracks;i++) {
10        printf ("CD #2: Track = %d    length inminutes = %f\n",
            i, (float)cdFromDB.track[i].lengthMs/60000.0 );
    }

    CreateUniqueId( &cd2UID, &cd2id );

15    printf( "Unique ID for CD #1 = %d%d\n", cd2UID.id[0],
        cd2UID.id[1] );

    CreateUniqueId( &cdFromDBUID, &cdFromDB );
20    printf( "Unique ID for CD #2 = %d%d\n", cdFromDBUID.id[0],
        cdFromDBUID.id[1] );

    matchtest = (cd2UID.id[0] == cdFromDBUID.id[0]) &&
25    (cd2UID.id[1] == cdFromDBUID.id[1]);

    printf ("The cd's match if result is non zero
        matchresult=%d",matchtest);

30    printf ("\n");

    printf ("\n");
    printf ("Test #2 will compare two cd that are nearly the
35    same\nexcept they have diffent # of tracks \n");

    // put in some test values for the cd track lengths
    // since thes are in ms, its basically 60000 = 1 minute
    cd2id.track[0].beginMs = 0;
40    cd2id.track[1].beginMs = 100001;
    cd2id.track[2].beginMs = 231001;
    cd2id.track[3].beginMs = 345001;
    cd2id.track[4].beginMs = 435001;
45    cd2id.track[5].beginMs = 460001;
    cd2id.track[6].beginMs = 590001;
    cd2id.track[0].endMs = 100000;
    cd2id.track[1].endMs = 231000;
    cd2id.track[2].endMs = 345000;
50    cd2id.track[3].endMs = 435000;
    cd2id.track[4].endMs = 460000;
    cd2id.track[5].endMs = 590000;

```

55



```

        cd2id.track[6].endMs = 690000;

5      cd2id.track[0].lengthMs = cd2id.track[0].endMs -
        cd2id.track[0].beginMs;
        cd2id.track[1].lengthMs = cd2id.track[1].endMs -
        cd2id.track[1].beginMs;
10     cd2id.track[2].lengthMs = cd2id.track[2].endMs -
        cd2id.track[2].beginMs;
        cd2id.track[3].lengthMs = cd2id.track[3].endMs -
        cd2id.track[3].beginMs;
        cd2id.track[4].lengthMs = cd2id.track[4].endMs -
15     cd2id.track[4].beginMs;
        cd2id.track[5].lengthMs = cd2id.track[5].endMs -
        cd2id.track[5].beginMs;
        cd2id.track[6].lengthMs = cd2id.track[6].endMs -
20     cd2id.track[6].beginMs;
        cd2id.numberTracks = 7;

        for(i=1;i<cd2id.numberTracks;i++) {
            printf ("CD #1: Track = %d    length inminutes = %f\n",
25     i, (float)cd2id.track[i].lengthMs/60000.0 );
        }

        printf ("\n");
        cdFromDB.track[0].beginMs = 0;
30     cdFromDB.track[1].beginMs = 100001;
        cdFromDB.track[2].beginMs = 231001;
        cdFromDB.track[3].beginMs = 345001;
        cdFromDB.track[4].beginMs = 435001;
35     cdFromDB.track[5].beginMs = 460001;
        cdFromDB.track[6].beginMs = 590001;

        cdFromDB.track[0].endMs = 100000;
        cdFromDB.track[1].endMs = 231000;
40     cdFromDB.track[2].endMs = 345000;
        cdFromDB.track[3].endMs = 435000;
        cdFromDB.track[4].endMs = 460000;
        cdFromDB.track[5].endMs = 590000;

45     cdFromDB.track[0].lengthMs = cd2id.track[0].endMs -
        cd2id.track[0].beginMs;
        cdFromDB.track[1].lengthMs = cd2id.track[1].endMs -
        cd2id.track[1].beginMs;
50     cdFromDB.track[2].lengthMs = cd2id.track[2].endMs -
        cd2id.track[2].beginMs;

```

55

```

    cdFromDB.track[3].lengthMs = cd2id.track[3].endMs -
cd2id.track[3].beginMs;
5    cdFromDB.track[4].lengthMs = cd2id.track[4].endMs -
    cd2id.track[4].beginMs;
    cdFromDB.track[5].lengthMs = cd2id.track[5].endMs -
    cd2id.track[5].beginMs;
10    cdFromDB.numberTracks = 6;

    for(i=1;i<cdFromDB.numberTracks;i++) {
        printf ("CD #2: Track = %d    length inminutes = %f\n",
15    i, (float)cdFromDB.track[i].lengthMs/60000.0 );
    }

    CreateUniqueId( &cd2UID, &cd2id );
    printf( "Unique ID for CD #1 = %d%d\n", cd2UID.id[0],
20    cd2UID.id[1] );

    CreateUniqueId( &cdFromDBUID, &cdFromDB );
    printf( "Unique ID for CD #2 = %d%d\n", cdFromDBUID.id[0],
    cdFromDBUID.id[1] );
25

    matchtest = (cd2UID.id[0] == cdFromDBUID.id[0]) &&
    (cd2UID.id[1] == cdFromDBUID.id[1]);

    printf ("The cd's match if result is non zero
30    matchresult=%d",matchtest);
    printf ("\n");
    printf ("\n");
    }
35

```

#### Claims

- 40 1. A method of synchronizing content from a first CD with complementary content from a remote device delivered over a network, characterized by:
 

initially playing a first CD (30) on a local electronic device (10) to manifest first CD content;  
 separately transferring complementary content (60) and synchronization information (72) from a remote device  
 45 (40) to said local device over a network; and  
 locally controlling said local electronic device (10) to display said complementary content in synchronization with manifestation of said first CD content based on said synchronization information and CD status information (62) read from said first CD.
- 50 2. The method of claim 1 further characterized by:
 

transferring said CD status information (62) from said local electronic device to said remote device over a network; and  
 receiving said complementary content based on said CD status information.
- 55 3. The method of claim 1 wherein said first CD includes audio content.
4. The method of claim 1 wherein said first CD includes audio and video content.

5. The method of claim 1 wherein said first CD includes music.
6. The method of claim 1 further comprising:
  - 5 analyzing said first CD;  
computing an identification code based on said content of said first CD; and  
transferring complementary content and synchronization information from said remote device based on said identification code.
- 10 7. The method of claim 1 wherein said remote device is a network server.
8. The method of claim 1 wherein said remote device is a second user device.
9. A device for synchronizing content from a first CD with complementary content from a remote device delivered over a network, comprising:
  - 15 a local electronic device having a video display;  
a CD player connected to or integral with said local electronic device; and  
a communication unit to transfer complementary content and synchronization information from a remote device to said local device over a network,  
20 said local electronic device locally synchronizing manifestation of said complementary content in synchronization with content on said first CD by using said synchronization information and CD status information from said first CD.
- 25 10. The device of claim 9 wherein said communication unit transfers said CD information from said first CD to said remote device over a network; and receives said complementary content based on said CD status information.
11. The device of claim 9 wherein said first CD includes audio content.
- 30 12. The device of claim 9 wherein said first CD includes audio and video content.
13. The device of claim 9 wherein said first CD includes music.
14. The device of claim 9 further comprising:
  - 35 means for analyzing said first CD;  
means for computing an identification code based on said content of said first CD; and  
means for transferring complementary content and synchronization information from said remote device based on said identification code.
- 40 15. The device of claim 9 wherein said remote device is a network server.
16. The device of claim 9 wherein said remote device is a second user device.
- 45 17. The method of claim 6 wherein said computing uses at least one of length information and number of segments to obtain said identification code.
18. The method of claim 6 wherein said computing uses the length of each segment to obtain said identification code.

50

#### Patentansprüche

1. Verfahren zur Synchronisation eines Inhalts einer ersten CD mit einem komplementären Inhalt von einem entfernt angeordneten Gerät, der über ein Netzwerk übermittelt wird, dadurch gekennzeichnet, dass zunächst eine erste CD (30) auf einem lokalen elektronischen Gerät (10) gespielt wird zur Manifestation des Inhalts der ersten CD, der komplementäre Inhalt und eine Synchronisationsinformation (72) vom entfernten Gerät zum lokalen Gerät über das Netzwerk getrennt übertragen werden und das lokale elektronische Gerät (10) lokal gesteuert wird zur Anzeige des komplementären Inhalts in Synchronisation mit der Manifestation des Inhalts der ersten CD basierend

55

auf der Synchronisationsinformation und einer CD- Statusinformation (62), die aus der ersten CD ausgelesen wurde.

2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass die CD-Statusinformation (62) vom lokalen elektronischen Gerät über das Netzwerk zum entfernten Gerät übertragen wird und Empfang des komplementären Inhalts basierend auf der CD-Statusinformation.
3. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass die erste CD einen Audioinhalt aufweist.
4. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass die erste CD einen Audio- und einen Videoinhalt enthält.
5. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass die erste CD Musik enthält.
6. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass die erste CD analysiert wird, dass basierend auf dem Inhalt der ersten CD ein Identifikationscode ermittelt wird und dass der komplementäre Inhalt und die Synchronisationsinformation vom entfernten Gerät übertragen werden basierend auf dem Identifikationscode.
7. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass das entfernte Gerät ein Netzwerkservers ist.
8. Verfahren nach Anspruch 1, dadurch gekennzeichnet, dass das entfernte Gerät ein zweites Nutzergerät ist.
9. Vorrichtung zur Synchronisierung des Inhalts einer ersten CD mit einem komplementären Inhalt aus einem entfernten Gerät, der über ein Netzwerk bereitgestellt wird, mit den folgenden Merkmalen:
  - ein lokales elektronisches Gerät mit einem Videodisplay
  - ein CD-Player, der mit dem lokalen elektronischen Gerät verbunden ist oder in diesem integriert und
  - eine Kommunikationseinheit zum Übertragen des komplementären Inhalts und der Synchronisationsinformation von einem entfernten Gerät zum lokalen Gerät über das Netzwerk,wobei das lokale elektronische Gerät lokal die Manifestation des komplementären Inhalts synchronisiert in Synchronisation mit dem Inhalt der ersten CD unter Verwendung der Synchronisationsinformation und einer CD-Statusinformation von der ersten CD.
10. Vorrichtung nach Anspruch 9, dadurch gekennzeichnet, dass die Kommunikationseinheit die CD-Information von der ersten CD zum entfernten Gerät über ein Netzwerk überträgt und basierend auf der CD-Statusinformation den komplementären Inhalt empfängt.
11. Vorrichtung nach Anspruch 9, dadurch gekennzeichnet, dass die erste CD einen Audioinhalt enthält.
12. Vorrichtung nach Anspruch 9, dadurch gekennzeichnet, dass die CD einen Audio- und Videoinhalt enthält.
13. Vorrichtung nach Anspruch 9, dadurch gekennzeichnet, dass die erste CD einen Musikinhalt enthält.
14. Vorrichtung nach Anspruch 9, mit den weiteren Merkmalen:
  - Mittel zur Analysierung der ersten CD
  - Mittel zur Berechnung eines Identifikationscodes auf den Inhalt der ersten CD und
  - Mittel zur Übertragung des komplementären Inhalts und der Synchronisationsinformation vom entfernten Gerät unter Verwendung des Identifikationscodes.
15. Vorrichtung nach Anspruch 9, dadurch gekennzeichnet, dass das entfernte Gerät ein Netzwerkservers ist.
16. Vorrichtung nach Anspruch 9, dadurch gekennzeichnet, dass das entfernte Gerät ein zweites Nutzergerät ist.
17. Verfahren nach Anspruch 6, dadurch gekennzeichnet, dass die Berechnung mindestens eine Längeinformation und eine Anzahl von Segmenten enthält zur Erzielung des Identifikationscodes.

18. Verfahren nach Anspruch 6, dadurch gekennzeichnet, dass die Berechnung die Länge jedes Segments enthält zur Erzielung des Identifikationscodes.

## 5 Revendications

1. Procédé de synchronisation du contenu d'un premier disque CD et du contenu complémentaire d'un dispositif distant, distribué par un réseau, caractérisé par :

10 la lecture initiale d'un premier disque CD (30) sur un dispositif électronique local (10) pour la manifestation du contenu du premier disque CD,  
le transfert séparé du contenu complémentaire (60) et des informations de synchronisation (72) d'un dispositif distant (40) au dispositif local par un réseau, et  
15 la commande locale du dispositif électronique local (10) pour l'affichage du contenu complémentaire en synchronisme avec la manifestation du contenu du premier disque CD en fonction des informations de synchronisation et des informations (62) d'état de disque CD lues sur le premier disque CD.

2. Procédé selon la revendication 1, caractérisé en outre par :

20 le transfert des informations d'état de disque CD (62) du dispositif électronique local au dispositif distant par un réseau, et  
la réception du contenu complémentaire en fonction des informations d'état de disque CD.

3. Procédé selon la revendication 1, caractérisé en ce que le premier disque CD comprend un contenu d'audio-  
25 fréquences.

4. Procédé selon la revendication 1, caractérisé en ce que le premier disque CD comprend un contenu d'audio-  
fréquences et vidéo.

- 30 5. Procédé selon la revendication 1, caractérisé en ce que le premier disque CD comprend de la musique.

6. Procédé selon la revendication 1, comprenant en outre :

35 l'analyse du premier disque CD,  
le calcul d'un code d'identification d'après le contenu du premier disque CD, et  
le transfert du contenu complémentaire et des informations de synchronisation du dispositif distant en fonction dudit code d'identification.

- 40 7. Procédé selon la revendication 1, dans lequel le dispositif distant est un serveur de réseau.

8. Procédé selon la revendication 1, dans lequel le dispositif distant est un second dispositif utilisateur.

9. Dispositif de synchronisation du contenu d'un premier disque CD et du contenu complémentaire d'un dispositif distant, transmis par un réseau, comprenant :

45 un dispositif électronique local ayant un dispositif d'affichage vidéo,  
un lecteur de disque CD connecté au dispositif électronique local ou intégré à celui-ci, et  
une unité de communication destinée à transférer le contenu complémentaire et des informations de synchronisation du dispositif distant au dispositif local par un réseau,  
50 le dispositif électronique local synchronisant localement la manifestation du contenu complémentaire en synchronisme avec le contenu du premier disque CD par utilisation des informations de synchronisation et des informations d'état de disque CD provenant du premier disque CD.

10. Dispositif selon la revendication 9, dans lequel l'unité de communication transfère les informations de disque CD  
55 du premier disque CD au dispositif distant par un réseau, et reçoit le contenu complémentaire d'après les informations d'état de disque CD.

11. Dispositif selon la revendication 9, dans lequel le premier disque CD comporte un contenu d'audiofréquences.

12. Dispositif selon la revendication 9, dans lequel le premier disque CD comporte un contenu d'audiofréquences et vidéo.

13. Dispositif selon la revendication 9, dans lequel le premier disque CD comporte de la musique.

14. Dispositif selon la revendication 9, comprenant en outre :

un dispositif d'analyse du premier disque CD,  
un dispositif de calcul d'un code d'identification d'après le contenu du premier disque CD, et  
un dispositif de transfert du contenu complémentaire et des informations de synchronisation du dispositif distant d'après le code d'identification.

15. Dispositif selon la revendication 9, dans lequel le dispositif distant est un serveur de réseau.

16. Dispositif selon la revendication 9, dans lequel le dispositif distant est un second dispositif utilisateur.

17. Procédé selon la revendication 6, dans lequel le calcul met en oeuvre au moins des informations de longueur et un nombre de segments pour l'obtention du code d'identification.

18. Procédé selon la revendication 6, dans lequel le calcul utilise la longueur de chaque segment pour l'obtention du code d'identification.

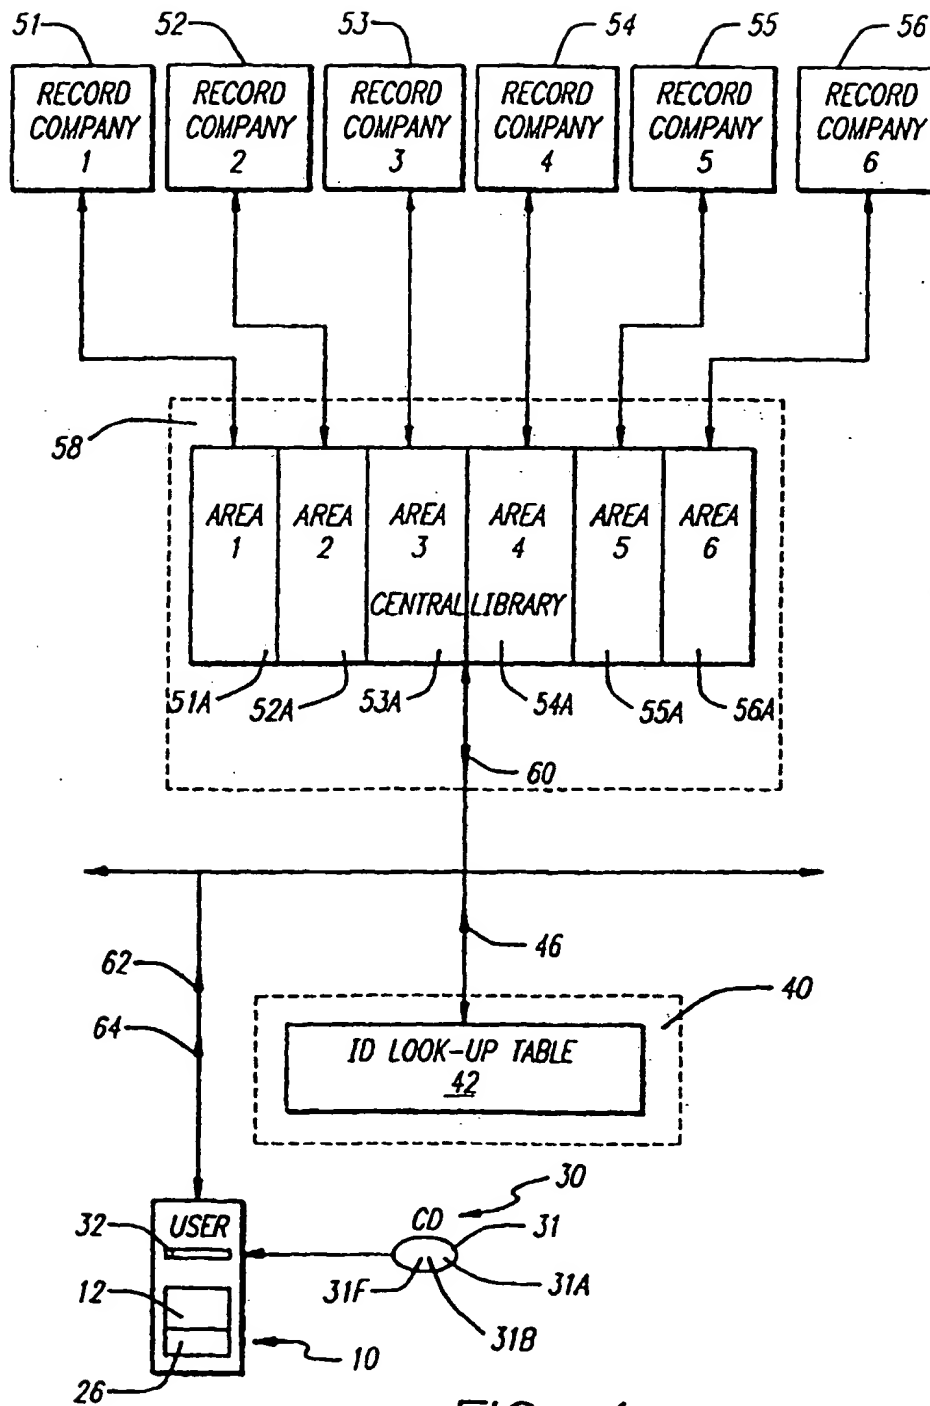


FIG. 1

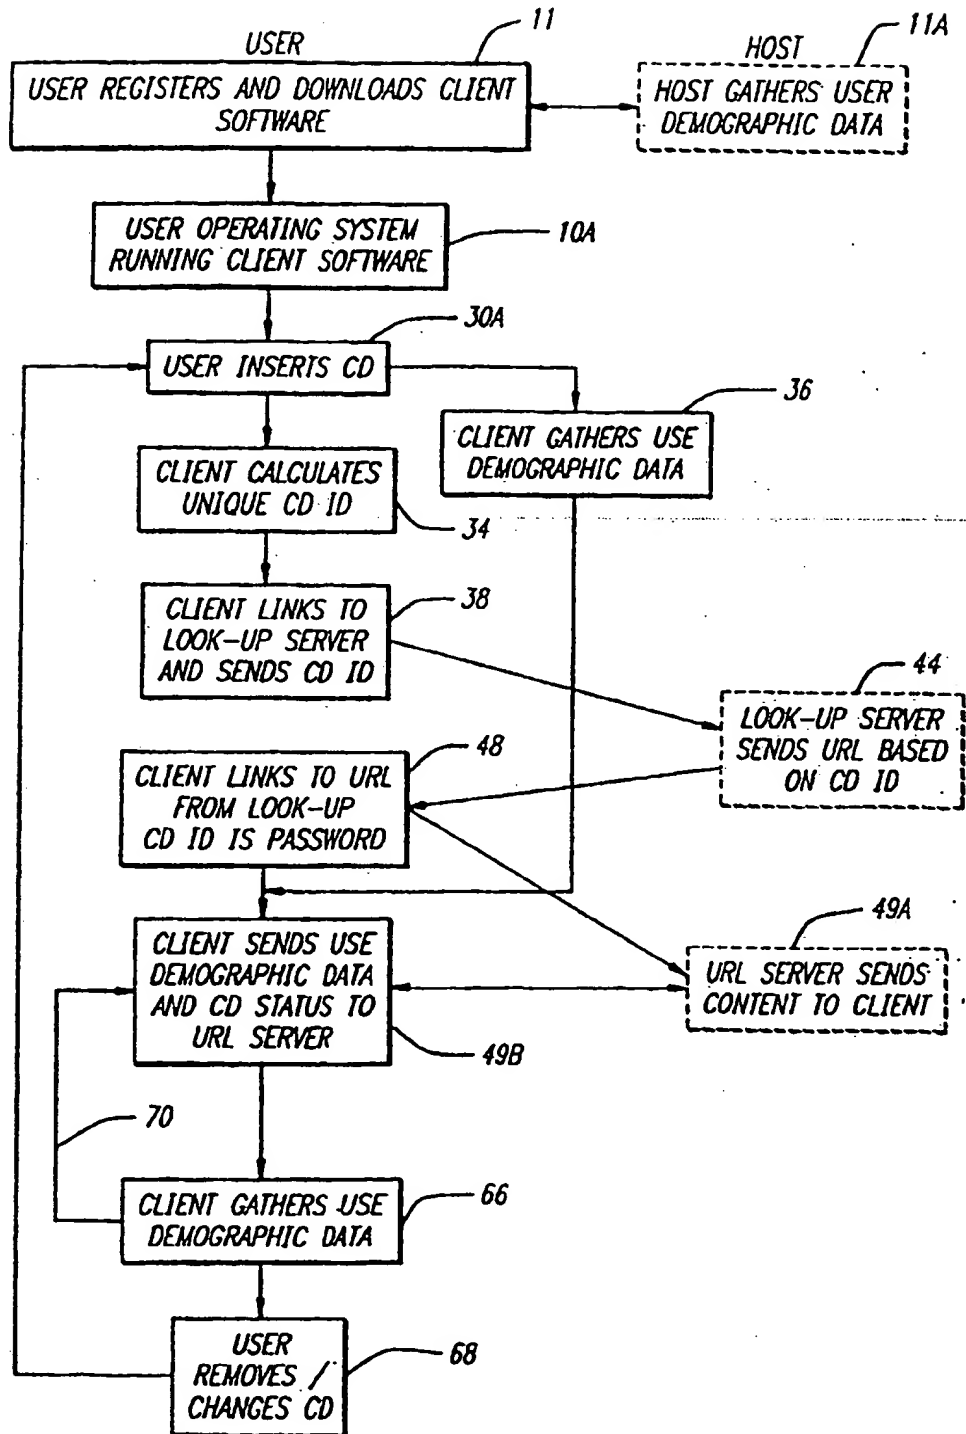


FIG. 2



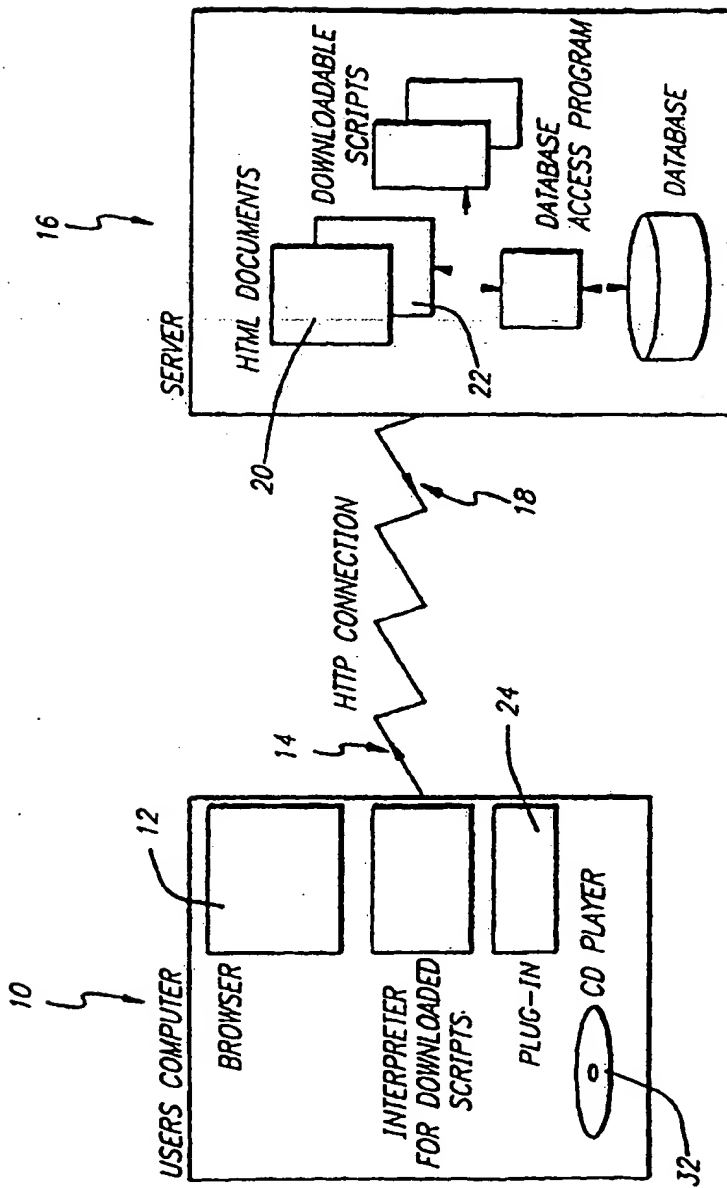


FIG. 3

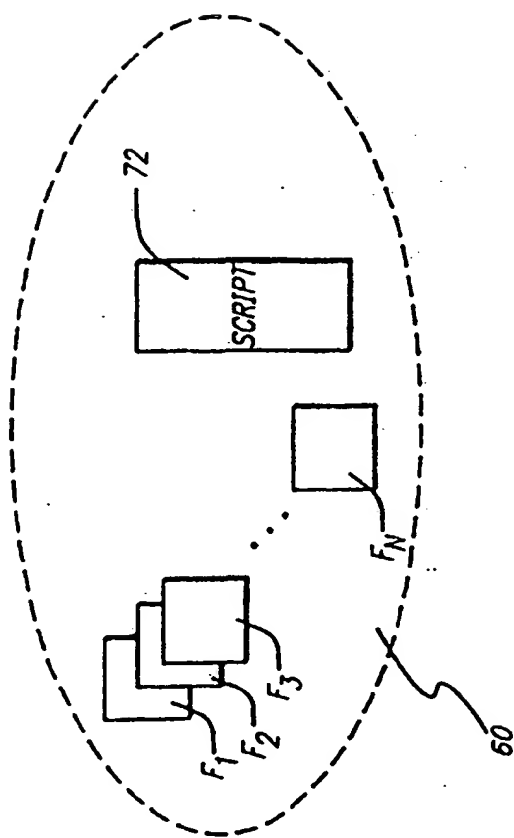


FIG. 4

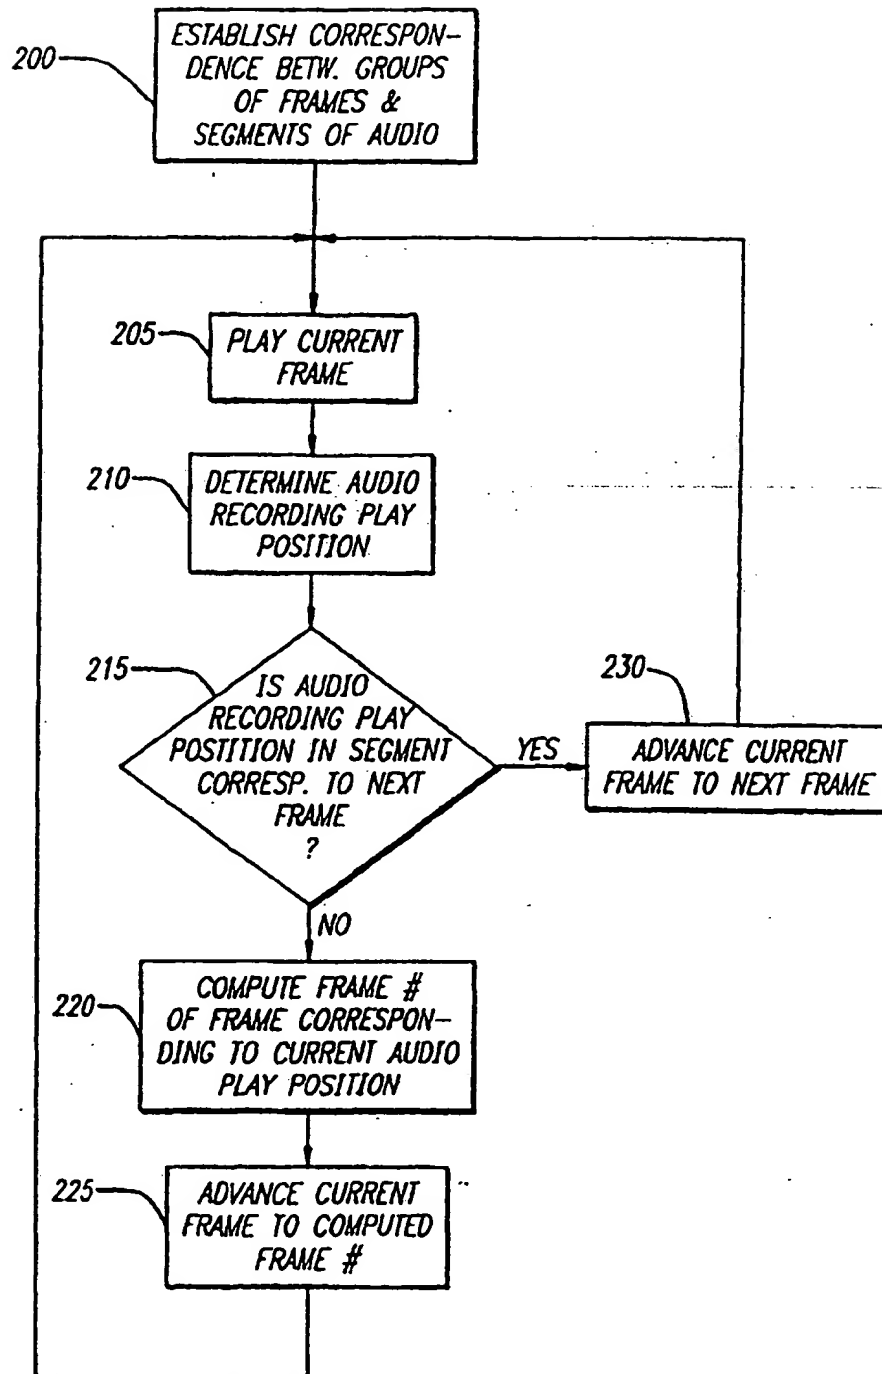


FIG. 5

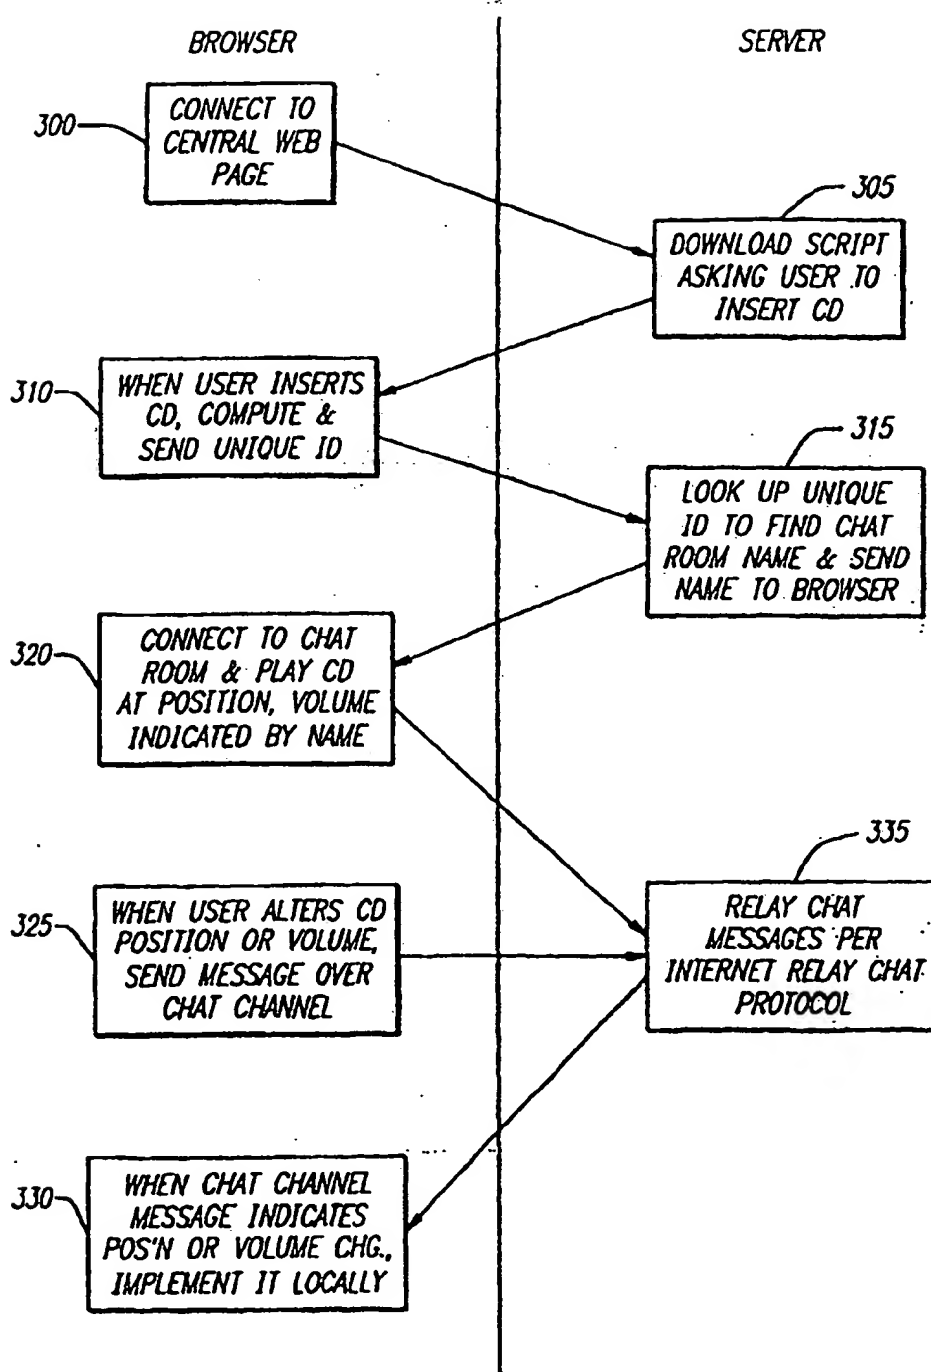


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☒ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**